



New American  
Stone Mills North LLC

1780 Hardwood Flats Rd.  
Wolcott, VT 05680  
802-279-8833

Stone Mill 26"  
With Integrated Sifter

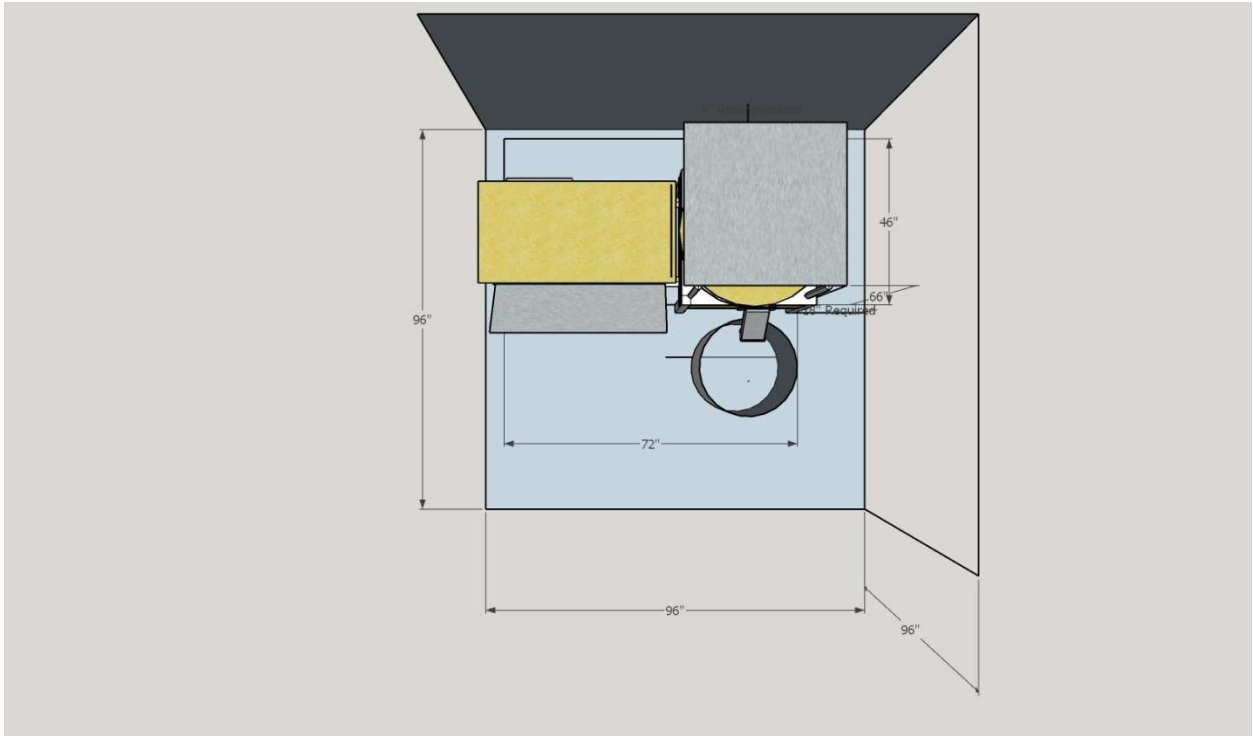

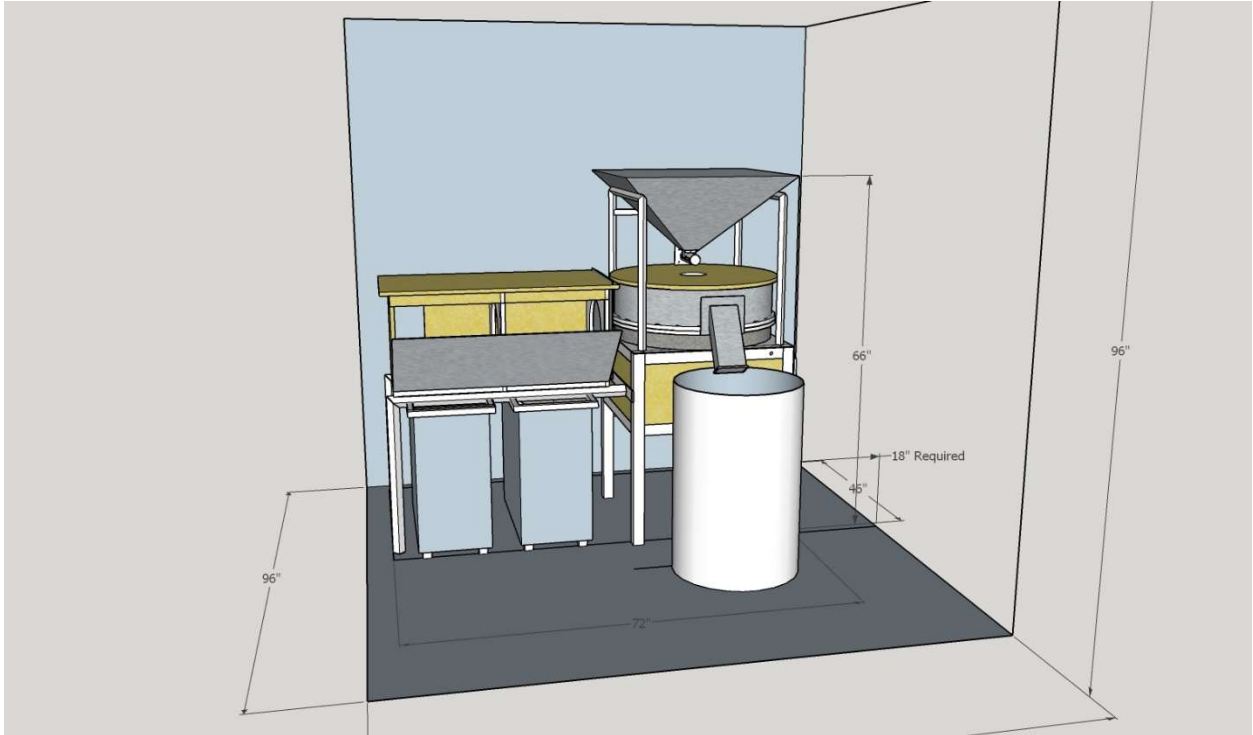

# Cut Sheet

- 26" Natural Barre Gray Granite millstones
- Welded steel frame, powder coated white
- 5 hp 3 phase motor TEFC UL listed
- Variable Frequency Drive for 3 phase service-NEMA 4 dust proof -soft starts, stops and adjusts motor speed-UL listed
- Stone casing- Baltic birch plywood with stainless steel lining
- Stainless hopper, approximately 100 lb. capacity
- Leveling Vibration Dampening Feet
- Integrated crane and yoke device for removing and flipping runner stone
- Wooden Safety guard around pulleys and drive belts
- Accurate Hand wheel stone adjustment with readout
- Volumetric auger and speed control for grain feed
- Chute height with canvas bucket cover to accommodate 32 gallon bucket
- 280 RPM Production Rate 50-75 pounds per hour
- Footprint is 72"x 46" and 66" tall 1500 lbs.
- Requires a dedicated 200-240 V Three phase 30 amp circuit with L15-30 receptacle
- Granite Millstones require annual re-dressing for optimum performance
- Milling, maintenance and stone dressing instructions included

**Sifter**

- Mild steel frame, powder coated white
  - 1/2 hp Three phase motor with starter TEFC UL listed
  - Flour casing- plywood with stainless steel
  - 2 outlets for flour and bran
  - Removable screens for cleaning
  - One set of fine 275 micron screens
  - Additional screen sizes available
  - Canvas sleeves for discharge included.
  - Footprint is 20" wide by 38" long by 50" tall
- Approximately 100 lbs.

**Requirements:**

- Floor-suitable to support 1400 lb. load
- Doorway-minimum 36" wide to receive mill
- Ceiling height 90" minimum
- Minimum recommended room size 8'x 8'
- 6" Clearance to wall behind mill
- 18" Clearance to wall to the left side of mill
- Electrical Service-One Circuit 200-240 Volt Three Phase with 30 Amps capacity. Requires one L15-30 receptacle behind mill